

SUNNY TRIPOWER 15000TL / 20000TL

ECONOMIC EXCELLENCE



STP 15000TL-10 / STP 20000TL-10



Economical

- Maximum efficiency 98.5 %
- OptiTrac for best MPP tracking efficiency

- Active temperature management with OptiCool
- Bluetooth® communication

Simple

- Three-phase feed-in
- Cable connection without tools
- SUNCLIX DC plug-in system

Flexible & future-proof


- DC input voltage up to 1,000 V
- Integrated grid management functions
- Reactive power capability

SUNNY TRIPOWER 15000TL / 20000TL

ECONOMIC EXCELLENCE

The expert cost saver for high-yield, commercial plants

Peak performance at a significantly reduced specific price: the new Sunny Tripower TL Economic Excellence is the next logical step in the development of the Sunny Tripower series in terms of achieving an optimum price-performance ratio. On the one hand, it brings with it a considerable reduction in investment costs, while on the other hand guaranteeing exceptionally high yields with an efficiency of 98.5%. Hence, the Sunny Tripower TL Economic Excellence is the ideal inverter solution for uniformly structured PV plants on the medium to very large scale. The focus is on the essentials and meets all requirements, including reactive power provision, grid support, and grid management integration.

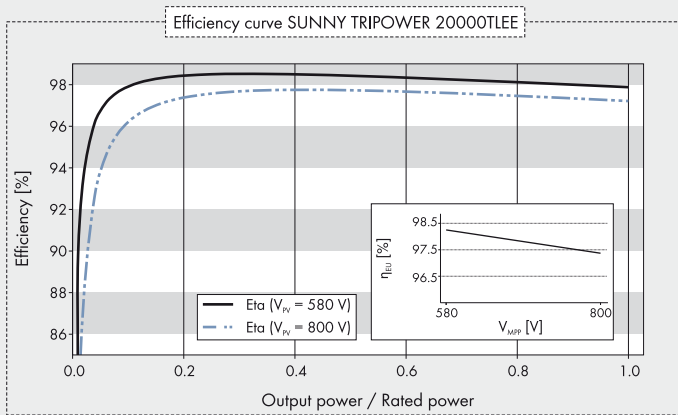

Accessories



RS485 interface
DM-485CB-10



Speedwire/Webconnect
interface SWDM-10



Multi-function relay
MFR01-10



Power Control Module
PWCMOD-10

* Does not apply to all national appendices of EN 50438
Provisional data, as of July 2013

Provisional Technical Data

Input (DC)

Max. DC power (@ $\cos \phi = 1$)	15 260 W	20 450 W
Max. input voltage	1 000 V	1 000 V
MPP voltage range with a line voltage of 230 V / rated input voltage	580 V - 800 V / 580 V	580 V - 800 V / 580 V
Min. input voltage / start input voltage	570 V / 620 V	570 V / 620 V
Max. input current	36 A	36 A
Max. input current per string	36 A	36 A
Number of independent MPP inputs / strings per MPP input	1 / 6	1 / 6

Output (AC)

Rated power (@ 230 V, 50 Hz)	15 000 W	20 000 W
Max. apparent AC power	15 000 VA	20 000 VA
Nominal AC voltage	3 / N / PE, 230 V / 400 V	3 / N / PE, 230 V / 400 V
Nominal AC voltage range	160 V - 280 V	160 V - 280 V
AC power frequency / range	50 Hz, 60 Hz / -6 Hz, +5 Hz	50 Hz, 60 Hz / -6 Hz, +5 Hz
Rated power frequency / rated grid voltage	50 Hz / 230 V	50 Hz / 230 V
Max. output current	24 A	29 A
Power factor at rated power	1	1
Displacement power factor, adjustable	0.8 overexcited ... 0.8 underexcited	0.8 overexcited ... 0.8 underexcited
Feed-in phases / connection phases	3 / 3	3 / 3

Efficiency

Max. efficiency / European weighted efficiency	98.5% / 98.3%	98.5% / 98.2%
--	---------------	---------------

Protective devices

DC-side disconnection device	○	○
Ground fault monitoring / grid monitoring	● / ●	● / ●
DC surge arrester (type II), can be integrated	-	-
DC reverse polarity protection / AC short-circuit current capability / galvanically isolated	● / ● / -	● / ● / -
All-pole-sensitive residual-current monitoring unit	●	●
Protection class (as per IEC 62103) / overvoltage category (as per IEC 60664-1)	I / III	I / III

General data

Dimensions (W/H/D)	665 / 680 / 265 mm (26.2 / 26.8 / 10.4 inch)	665 / 680 / 265 mm (26.2 / 26.8 / 10.4 inch)
Weight	45 kg (99.2 lb)	45 kg (99.2 lb)
Operating temperature range	-25 °C ... +60 °C (-13 °F ... +140 °F)	-25 °C ... +60 °C (-13 °F ... +140 °F)
Noise emission (typical)	51 dB(A)	51 dB(A)
Self-consumption (at night)	1 W	1 W
Topology / cooling concept	Transformerless / OptiCool	Transformerless / OptiCool
Degree of protection (per IEC 60529)	IP65	IP65
Climatic category (as per IEC 60721-3-4)	4K4H	4K4H
Maximum permissible value for relative humidity (non-condensing)	100%	100%

Features

DC terminal	SUNCLIX	SUNCLIX
AC connection	Spring clamp terminal	Spring clamp terminal
Display	Chart	Chart
Interfaces: RS485, Bluetooth®, Speedwire/Webconnect	○ / ● / ○	○ / ● / ○
Multi-function relay / Power Control Module	○ / ○	○ / ○
Warranty: 5 / 10 / 15 / 20 / 25 years	● / ○ / ○ / ○ / ○	● / ○ / ○ / ○ / ○

Certificates and approvals (more available on request)

● Standard features ○ Optional features - Not available - Data at nominal conditions

Type designation	STP 15000TLEE-10	STP 20000TLEE-10
------------------	------------------	------------------

AS 4777, BDEW 2008, C10/11, CE, CEI 0-21, EN 50438*, G59/2, IEC 61727, IEC 62109-1/2, NEN EN 50438, PPC, PPDS, RD 1699, RD 661/2007, SI4777, UTE C15-712-1, VDE 0126-1-1, VDE-AR-N 4105